


Filter solutions for HAM RADIO

LOW
BAND
SYSTEMS

RA6LBS
Volgodonsk,
347382
Russian Federation

BAND PASS FILTER "PerfoBox-200Watts" BAND 14MHz (20m) SERIAL NUMBER: 0816_264

17.08.2016 17:48:36

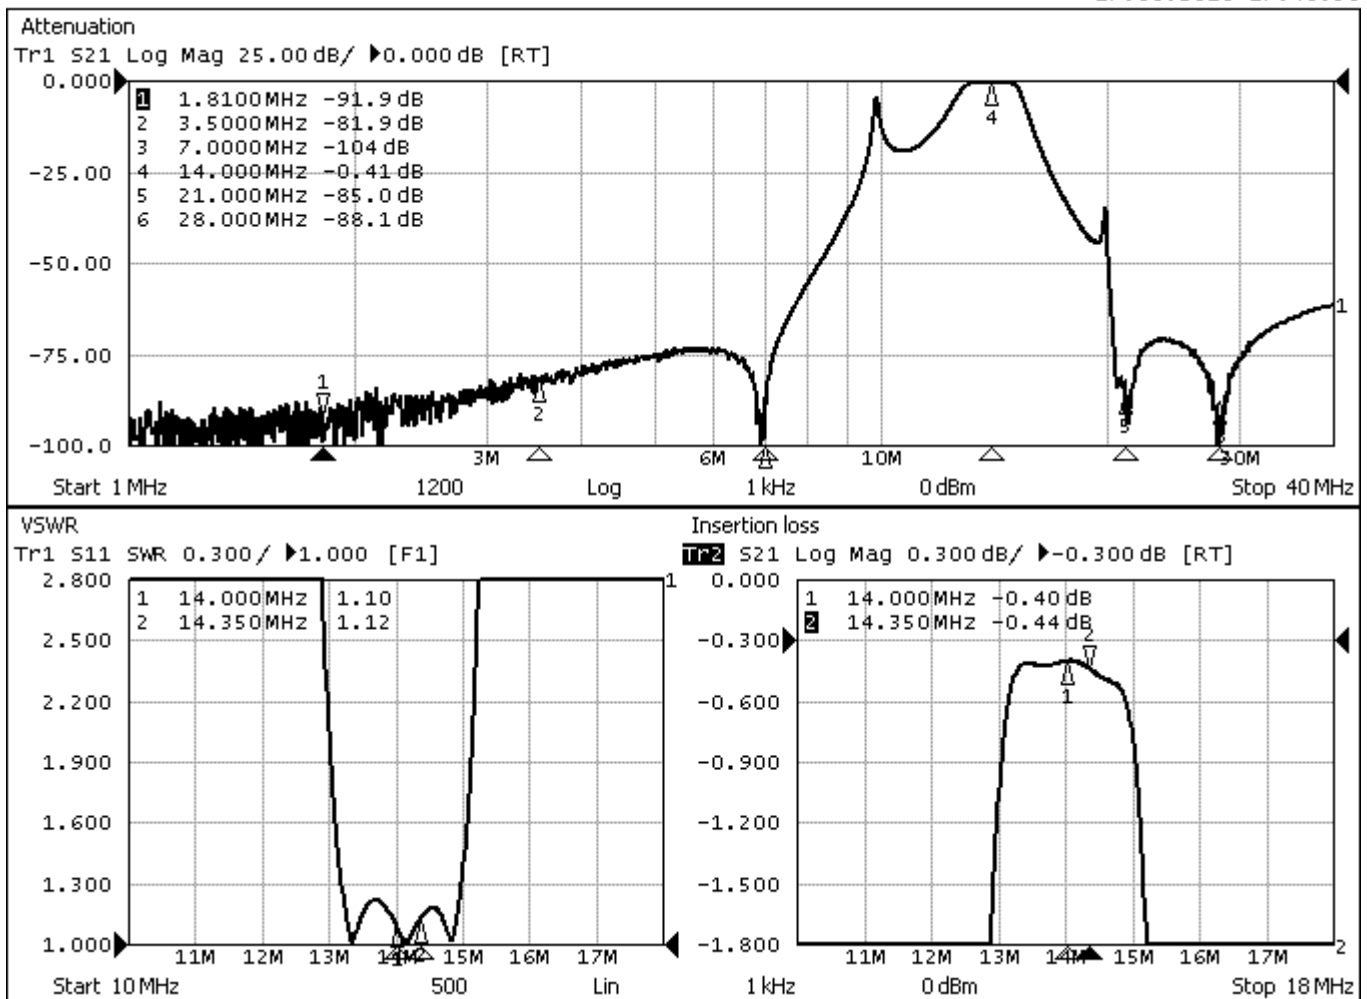

Specifications:

Rejection on a nearby band:	typical ≥ 70 dB
Rejection on + - 2F:	typical ≥ 75 dB
VSWR:	typical less 1:1.25
Loss in the passband:	typical 0.6 dB
Impedance:	50 Ohm
Maximum ICAS power:	200W
Dimensions of the filter:	192x86x65 mm
Weight:	0.480 kg.

September 26, 2016


Filter solutions for HAM RADIO

LOW
BAND
SYSTEMS

RA6LBS
Volgodonsk,
347382
Russian Federation

BAND PASS FILTER "PerfoBox-200Watts" **BAND 21MHz (15m)** **SERIAL NUMBER: 0816_267**

18.08.2016 9:04:38

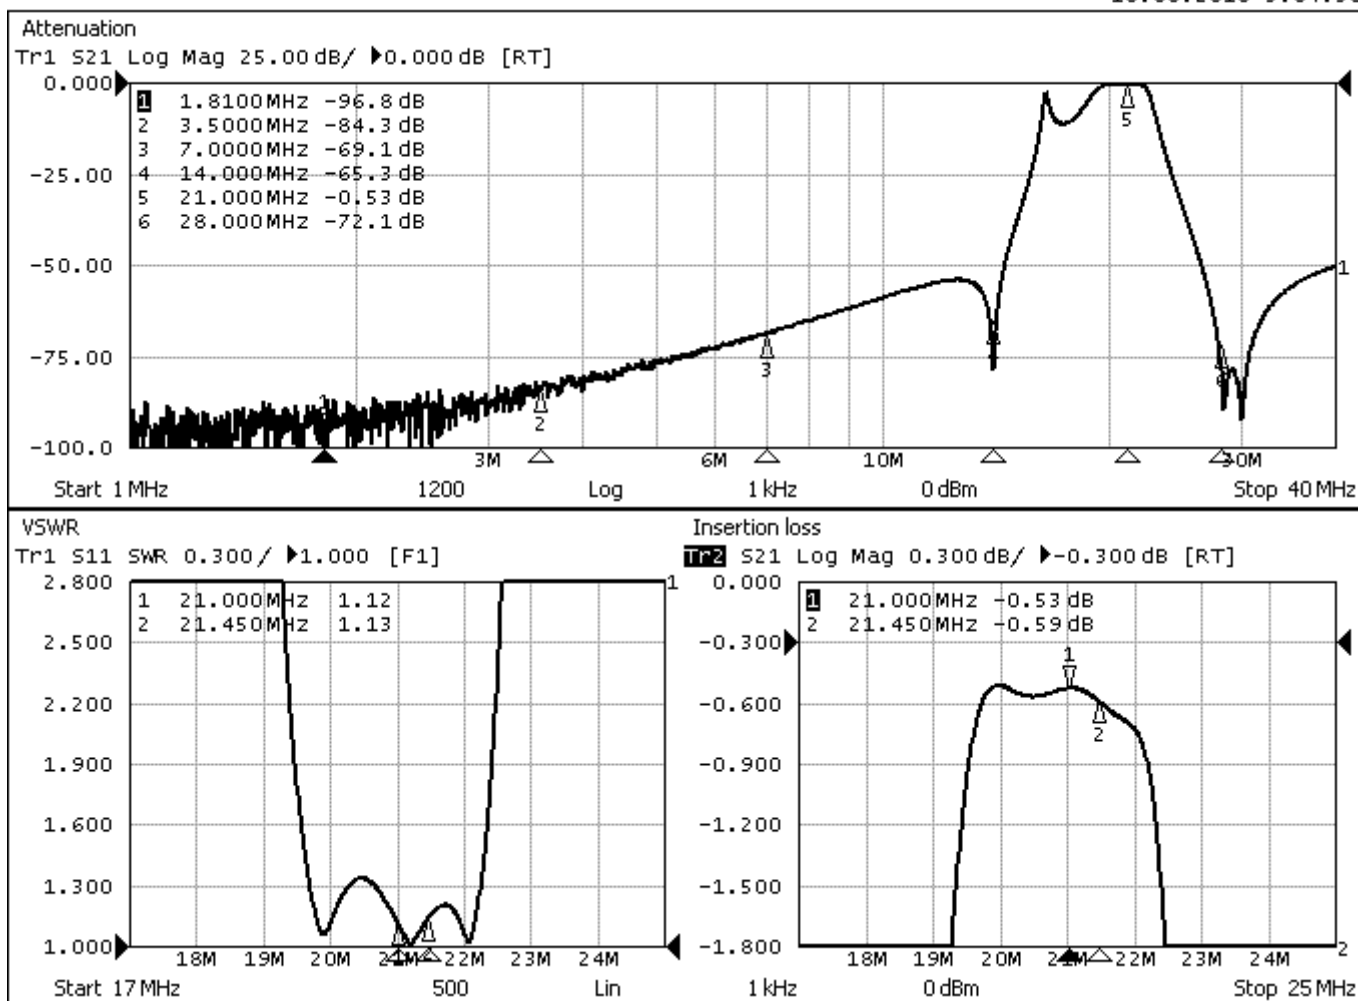

Specifications:

Rejection on a nearby band:	typical ≥ 50 dB
Rejection on + - 2F:	typical ≥ 60 dB
VSWR:	typical less 1:1.25
Loss in the passband:	typical 0.65 dB
Impedance:	50 Ohm
Maximum ICAS power:	200W
Dimensions of the filter:	192x86x65 mm
Weight:	0.420 kg.

September 26, 2016


Filter solutions for HAM RADIO

LOW
BAND
SYSTEMS

RA6LBS
Volgodonsk,
347382
Russian Federation

BAND PASS FILTER "PerfoBox-200Watts" BAND 28MHz (10m) SERIAL NUMBER: 0816_265

18.08.2016 8:35:46

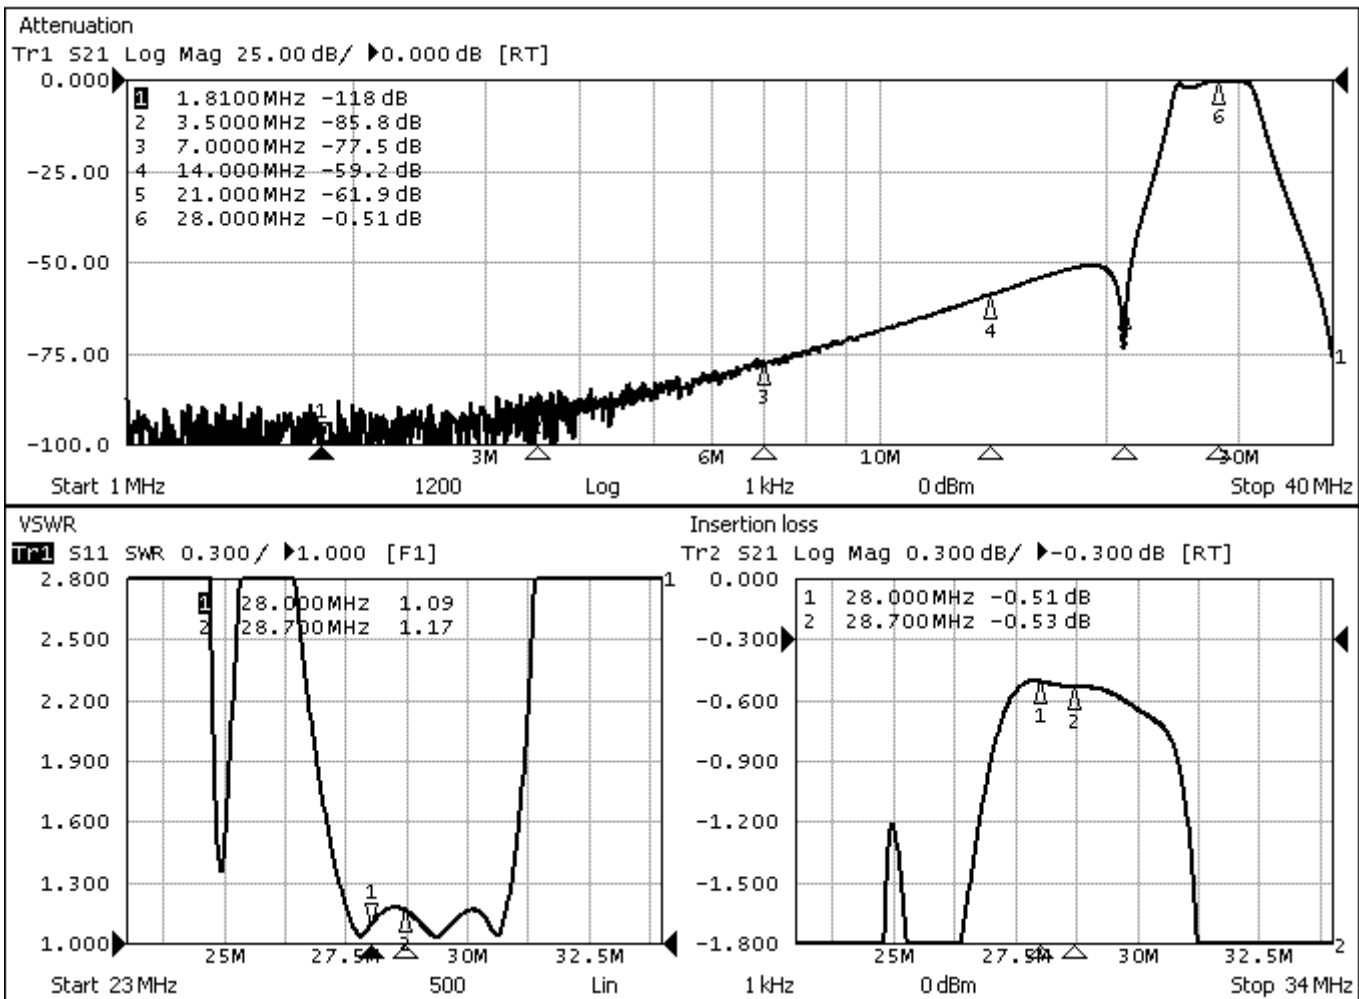

Specifications:

Rejection on a nearby band:	typical ≥ 50 dB
Rejection on $\pm 2F$:	typical ≥ 55 dB
VSWR:	typical less 1:1.25
Loss in the passband:	typical 0.65 dB
Impedance:	50 Ohm
Maximum ICAS power:	200W
Dimensions of the filter:	192x86x65 mm
Weight:	0.410 kg.

September 26, 2016